
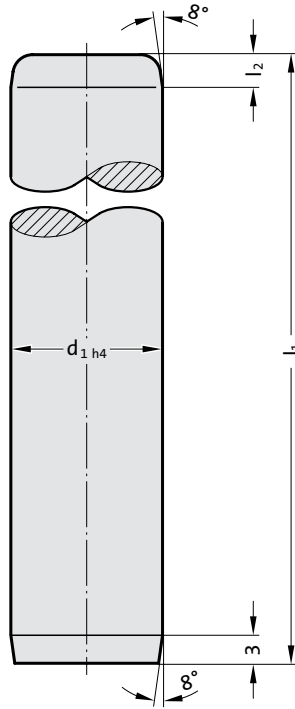


Mounting Example:

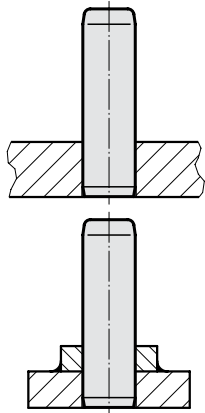

Material:

Steel, surface hardened
 Surface Hardness: 60+4 HRC
 induction hardened
 Hardness Penetration: 1.5 + 1 mm

Note:

Guide pillars only recommended for use with sliding guides.

d ₁	15 16	19 20	24 25	30 32	38 40	48 50	60 63	80
l ₂	4	4	6	6	6	8	8	8
l ₁								
80								
90	•							
100	•	•	•					
112	•	•	•					
125	•	•	•	•				
140	•	•	•	•				
160	•	•	•	•	•			
180	•	•	•	•	•	•		
200	•	•	•	•	•	•		
224	•	•	•	•	•	•		
250	•	•	•	•	•	•		
280	•	•	•	•	•	•	•	
315	•	•	•	•	•	•	•	•
355	•	•	•	•	•	•	•	•
400		•	•	•	•	•	•	•
450			•	•	•	•	•	•
500			•	•	•	•	•	•
550					•	•	•	•
600					•	•	•	•
700					•	•	•	•
800					•	•	•	•

Ordering code (example):

Guide Pillar = 202.29.
 d₁ = 32 mm = 032.
 l₁ = 180 mm = .180
 Order No = 202.29.032.180

Order No. 2.5304.00.1109.01000
 T1/2009 © Copyright by FIBRO GmbH
 Printed in Germany on paper bleached without chlorine

